



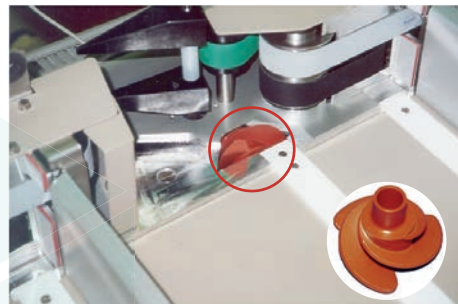

PA ●

ERTALON® 4.6

Semi-crystalline plastic, compared to conventional polyamides, ERTALON® 4.6 is characterized by maintaining its creep resistance over a wider range of temperatures, also having a higher heat resistance over an extended period.



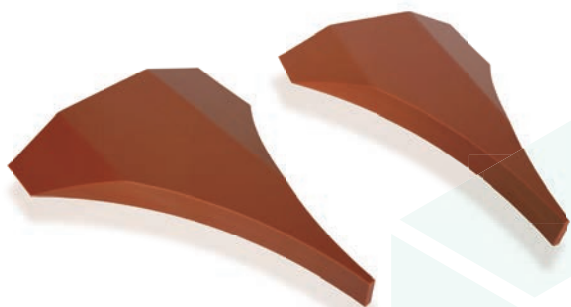


MAIN CHARACTERISTICS

- High mechanical, creep and heat resistance for extended periods of time
- Polyamide with higher temperature resistance
- Greater resistance to thermal ageing
- Slight decrease in dimensional stability
- Good sliding properties
- Good properties of electrical insulation
- Excellent wear resistance
- High mechanical damping capacity
- Good resistance to high energy radiation (gamma rays and X-rays)
- Easy machining

APPLICATIONS

- Applications within a higher range of temperatures (80 - 150°C)
- Applications where the mechanical resistance, creep, stiffness, temperature and wear resistance of PA 6, PA 66, POM and PET are insufficient

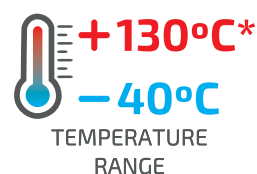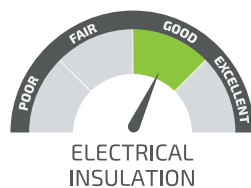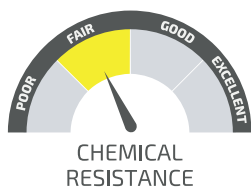

*continuously (20.000H)

All figures given are indicative only, Polylanema Lda. is not liable for the use of the materials without consulting with our technical department.



PROPERTIES	TEST METHODS	UNITS	ERTALON® 4.6
COLOR		-	REDDISH BROWN
DENSITY	ISO 1183-1	g/cm³	1.19
WATER ABSORPTION			
AFTER 24/96H IMMERSION IN WATER OF 23°C¹	ISO 62	mg	90/180
AFTER 24/96H IMMERSION IN WATER OF 23°C¹	ISO 62	%	1.30/2.60
AT SATURATION IN AIR OF 23°C / 50% RH	-	%	2.8
AT SATURATION IN WATER OF A 23°C	-	%	9.5
THERMAL PROPERTIES²			
MELTING TEMPERARUTE (DSC, 10°C/MIN)	ISO 11357-1/-3	°C	290
GLASS TRANSITION TEMPERATURE (DSC, 20°C/MIN)³	ISO 11357-1/-3	°C	-
THERMAL CONDUCTIVITY A 23°C	-	W/(K.m)	0.30
COEFFICIENT OF LINEAR THERMAL EXPANSION			
AVERAGE VALUE BETWEEN 23-60°C	-	M/(m.K)	80 x 10⁻⁶
AVERAGE VALUE BETWEEN 23-100°C	-	M/(m.K)	90 x 10⁻⁶
TEMPERATURE OF DEFLECTION UNDER LOAD			
METHOD A 1.8 MPA	+ ISO 75-1/-2	°C	160
MAXIMUM ALLOABLE SERVICE TEMPERATURE IN AIR			
FOR SHORT PERIODS⁴	-	°C	200
CONTINUOUSLY: FOR 5.000/20.000H⁵	-	°C	150/130
MINIMUM SERVICE TEMPERATURE⁶	-	°C	-40
FAMMABILITY⁷			
"OXYGEN INDEX"	ISO 4589-1/-2	%	24
ACCORDING TO UL94 (3/6MM DE ESPESSURA)	-	-	HB/HB
MECHANICAL PROPERTIES AT 23°C⁸			
TENSION TEST⁹			
TENSILE STRESS AT YIELD/AT BREAK¹⁰	+ ISO 527-1/-2	MPa	105/-
TENSILE STRESS AT YIELD/AT BREAK¹⁰	++ ISO 527-1/-2	MPa	55/-
TENSILE STRENGTH¹⁰	+ ISO 527-1/-2	MPa	105
TENSILE STRAIN AT YIELD¹⁰	+ ISO 527-1/-2	%	18
TENSILE STRAIN AT BREAK¹⁰	+ ISO 527-1/-2	%	25
TENSILE STRAIN AT BREAK¹⁰	++ ISO 527-1/-2	%	>50
TENSILE MODULUS OF ELASTICITY¹¹	+ ISO 527-1/-2	MPa	3400
TENSILE MODULUS OF ELASTICITY¹¹	++ ISO 527-1/-2	MPa	1350
COMPRESSION TEST¹²			
COMPRESSIVE STRESS AT 1/2/5% NOMINAL STRAIN¹¹	+ ISO 604	MPa	31/60/102
CHARPY IMPACT STRENGTH - UNNOTCHED¹³	+ ISO 179-1/1eU	KJ/m²	NO BREAK
CHARPY IMPACT STRENGTH - NOTCHED	+ ISO 179-1/1eA	KJ/m²	8
BALL IDENTATION HARDNESS⁴	+ ISO 2039-1	N/mm²	165
ROCKWELL HARDNESS¹⁴	+ ISO 2039-2	-	M 92
ELECTRICAL PROPERTIES AT 23°C			
ELECTRIC STRENGTH¹⁵	+ IEC 60243-1	kV/mm	25
ELECTRIC STRENGTH¹⁵	++ IEC 60243-1	kV/mm	15
VOLUME RESISTIVITY	+ IEC 60093	Ohm.cm	> 10¹⁶
VOLUME RESISTIVITY	++ IEC 60093	Ohm.cm	> 10¹²
SURFACE RESISTIVITY	+ IEC 60093	Ohm	> 10¹³
SURFACE RESISTIVITY	++ IEC 60093	Ohm	> 10¹²
RELATIVE PERMITTIVITY εᵣ : A 100HZ	+ IEC 60250	-	3.8
RELATIVE PERMITTIVITY εᵣ : A 100HZ	++ IEC 60250	-	7.4
RELATIVE PERMITTIVITY εᵣ : A 1MHZ	+ IEC 60250	-	3.4
RELATIVE PERMITTIVITY εᵣ : A 1MHZ	++ IEC 60250	-	3.8
DIELECTRIC DISSIPATION FACTOR TAN δ : A 100HZ	+ IEC 60250	-	0.009
DIELECTRIC DISSIPATION FACTOR TAN δ : A 100HZ	++ IEC 60250	-	0.13
DIELECTRIC DISSIPATION FACTOR TAN δ : A 1MHZ	+ IEC 60250	-	0.019
DIELECTRIC DISSIPATION FACTOR TAN δ : A 1MHZ	++ IEC 60250	-	0.06
COMPARATIVE TRACKING INDEX (CTI)	+ IEC 60112	-	400
COMPARATIVE TRACKING INDEX (CTI)	++ IEC 60112	-	400

NOTE: 1 g/cm³ = 1000 kg/m³ ; 1 MPa = 1 N/mm² ; 1 KV/mm = 1 MV/m

+: values for dry material
++: values referring to material in equilibrium with the standard atmosphere 23°C / 50% rh

(1) According to method 1 of ISO 62 and measured on ø 50x3 mm discs. **(2)** The elements supplied for this property are for the most part supplied by the manufacturers of the raw materials. **(3)** The values of this property are only attributed to amorphous rather than semi-crystalline materials. **(4)** Only for short periods of exposure in applications where only very low loads are applied to the material. **(5)** Temperature that resists after a period of 5,000 / 20,000 hours. After this time, there is a decrease of about 50% in tensile strength compared to the original value. The given temperature values are based on the thermal oxidation degradation which occurs which causes a reduction of the properties. In the meantime, the maximum permissible service temperature depends in many cases essentially on the deduction and magnitude of the mechanical stresses to which the material is subject. **(6)** As the impact strength decreases with decreasing temperature, the minimum allowable service temperature is determined by the extent of impact to which the material is subjected. The values given are based on unfavorable impact conditions and can not therefore be considered absolute limits. **(7)** These assessments derive from the technical specifications of the manufacturers of the raw materials and do not allow the determination of the behavior of the materials under fire conditions. **(8)** Most of the figures given by the properties of the (+) materials are mean values of the tests done on species machined with ø 40-60 mm. **(9)** Specimen testing: Type 1b. **(10)** Speed test: 5 or 50 mm / min. **(11)** Speed test: 1m / min. **(12)** Testing specimens: cylinders ø 8 x 16 mm. **(13)** Pendulum used: 15J. **(14)** Test on 10 mm thick specimens. **(15)** Electrode configuration: cylinders ø 25 / ø 75 mm, in transformer oil according to IEC 60296.

Note that the electrical force for the extruded black material can be considerably lower than that of natural material. The possible micro porosity in the center of conserved forms in stock significantly reduces the electric force.